

SEPAR FILTER

SEPAR 2000

SWK 2000/18/U




POS.	PARÇA NO ARTICLE NR.	ADET PIECES	PARÇA ADI	DESCRIPTION	POS.	PARÇA NO ARTICLE NR.	ADET PIECES	PARÇA ADI	DESCRIPTION
1	30408	2	Havalandırma	bleed valve	15	30472	2	O-Ring	gasket
2	30452	8	Vida	screw (lid)	16	30343	2	Tahliye Vanası	drain cock
3	30572	2	Kapak	lid	17	30560	2	Vida	screw
4	30421	2	Kapak Contası	lid gasket	18	30558	2	Conta	gasket f. Pos.1
5	30298	2	Yaylı Kaset	spring cassette	19	30721	8	Conta	gasket f. Pos.13
6	01830	2	Filtre Elemanı	filter element	20	30488	8	Vida	screw
7	30448	16	Pul	washer	21	30022	8	Somun	lock nut
8	30428	2	Gövde	housing	22	30021	16	Pul	washer
9	30423	2	Hazne Contası	bowl gasket	23	30464	4	Somun	straight fitting
10	30575	2	Hazne Sabitleme	bowl retainer ring	24	30465	1	Yön Vanası	reversing valve
11	30429	2	Merkezkaç	centrifuge	25	30466	1	Braket	mounting plate
12	30567	8	Vida	screw (for bawl retainer ring)	26	30492	1	Yön Kolu	reversing lever
13	30705	4	Tapa	blind screw	27	30338	2	Somun	union nut
14	30986	2	Hazne	bowl	28	30339	2	Racor Elemanı	cutting ring


SEPAR FILTER

SEPAR 2000

SWK 2000/18/U

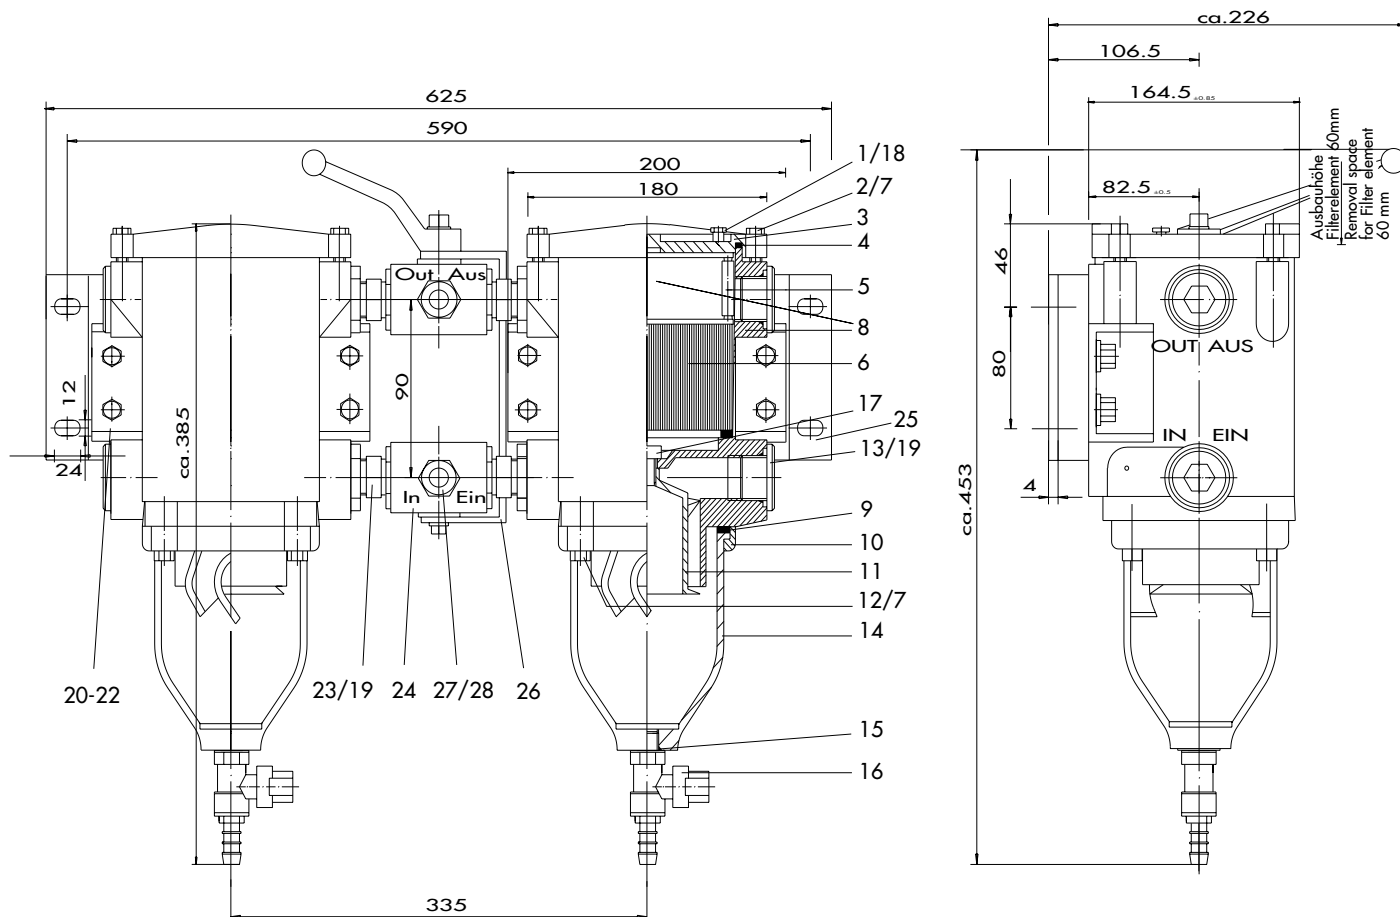

FLUSSDIAGRAMM · FLOW DIAGRAM

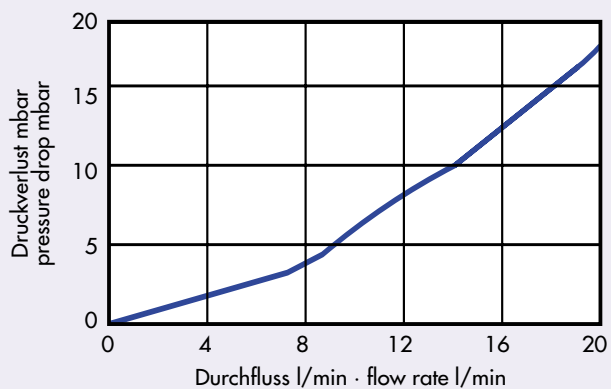

Max. Durchflussmenge: 18 l/min Anschluss: 22 mm Rohr Ø
 Max. flow rate: 18 l/min Connection: 22 mm Pipe Ø

Technische Änderungen vorbehalten
 We reserve the right to make technical changes without notification

Willibrord Lösing
 Filter-Technik



Postfach 86 6009
 45517 Hattingen
 Essener Straße 108
 45529 Hattingen
 Telefon 023 24/94600
 Telefax 023 24/40842