


SEPAR FILTER

SEPAR 2000

SWK 2000/5/U

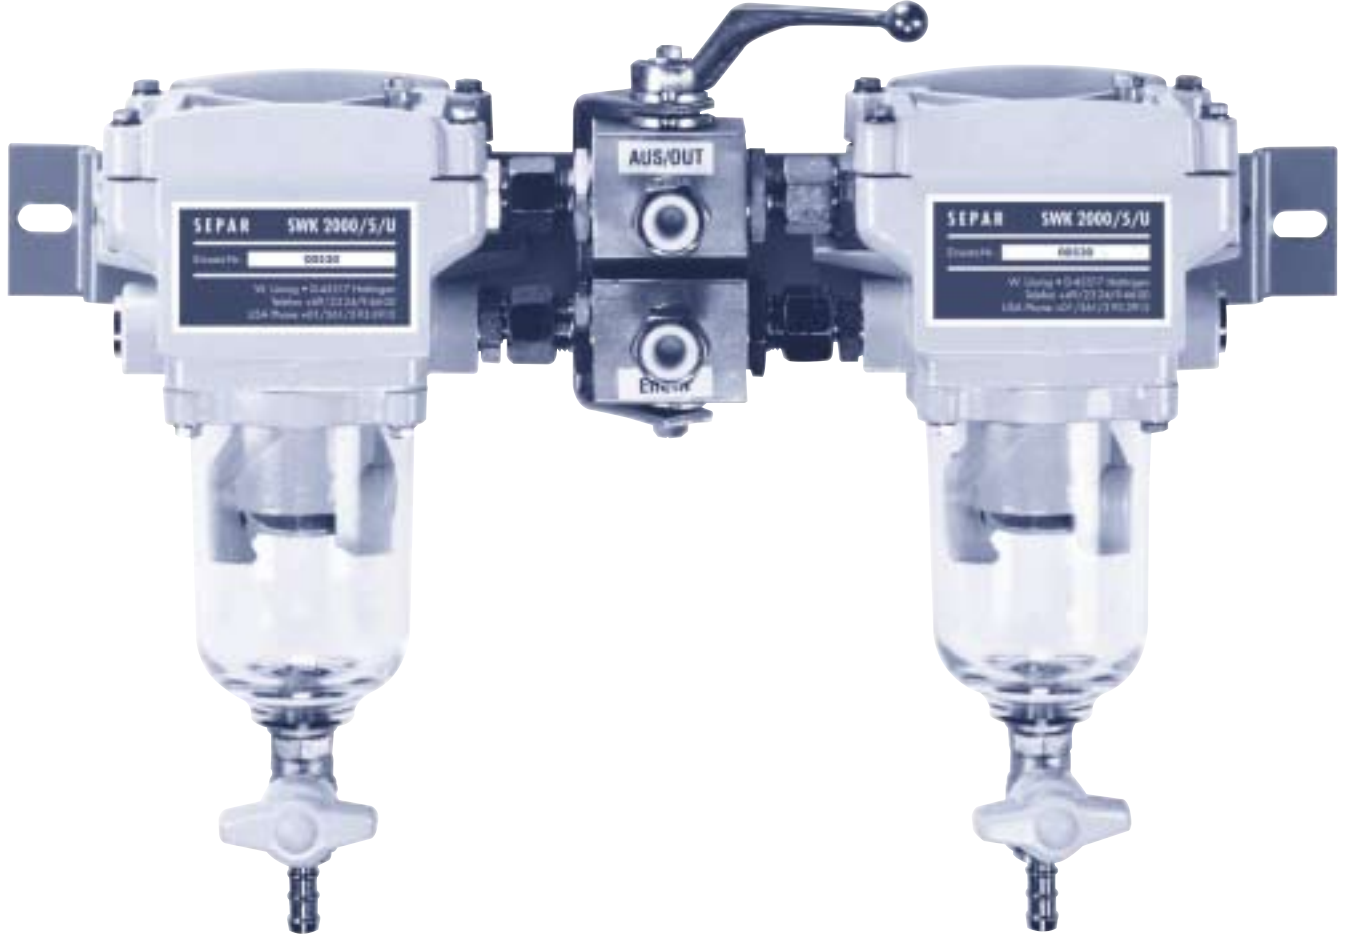


POS.	PARÇA NO ARTICLE NR.	ADET PIECES	PARÇA ADI	DESCRIPTION	POS.	PARÇA NO ARTICLE NR.	ADET PIECES	PARÇA ADI	DESCRIPTION
1	30408	2	Havalandırma	bleed valve	15	40002	2	O-Ring	gasket
2	30430	8	Vida	screw (lid)	16	30366	2	Tahliye Vanası	drain cock
3	30542	2	Kapak	lid	17	30560	2	Vida	screw
4	10367	2	Kapak Contası	lid gasket	18	30558	2	Conta	gasket f. Pos.1
5	30295	2	Yaylı Kaset	spring cassette	19	30472	8	Conta	gasket f. Pos.13
6	00530	2	Filtre Elemanı	filter element	20	30133	4	Vida	screw
7	30447	16	Pul	washer	21	30022	4	Somun	lock nut
8	30541	2	Gövde	housing	22	30021	8	Pul	washer
9	10366	2	Hazne Contası	bowl gasket	23	30473	4	Somun	straight fitting
10	30564	2	Hazne Sabitleme	bowl retainer ring	24	30474	1	Yön Vanası	reversing valve
11	30548	2	Merkezkaç	centrifuge	25	30475	1	Braket	mounting plate
12	30561	8	Vida	screw (for bawl retainer ring)	26	30490	1	Yön Kolu	reversing lever
13	30471	4	Tapa	blind screw	27	30249	2	Somun	union nut
14	30984	2	Hazne	bowl	28	30250	2	Racor Elemanı	cutting ring


SEPAR FILTER

SEPAR 2000

SWK 2000/5/U

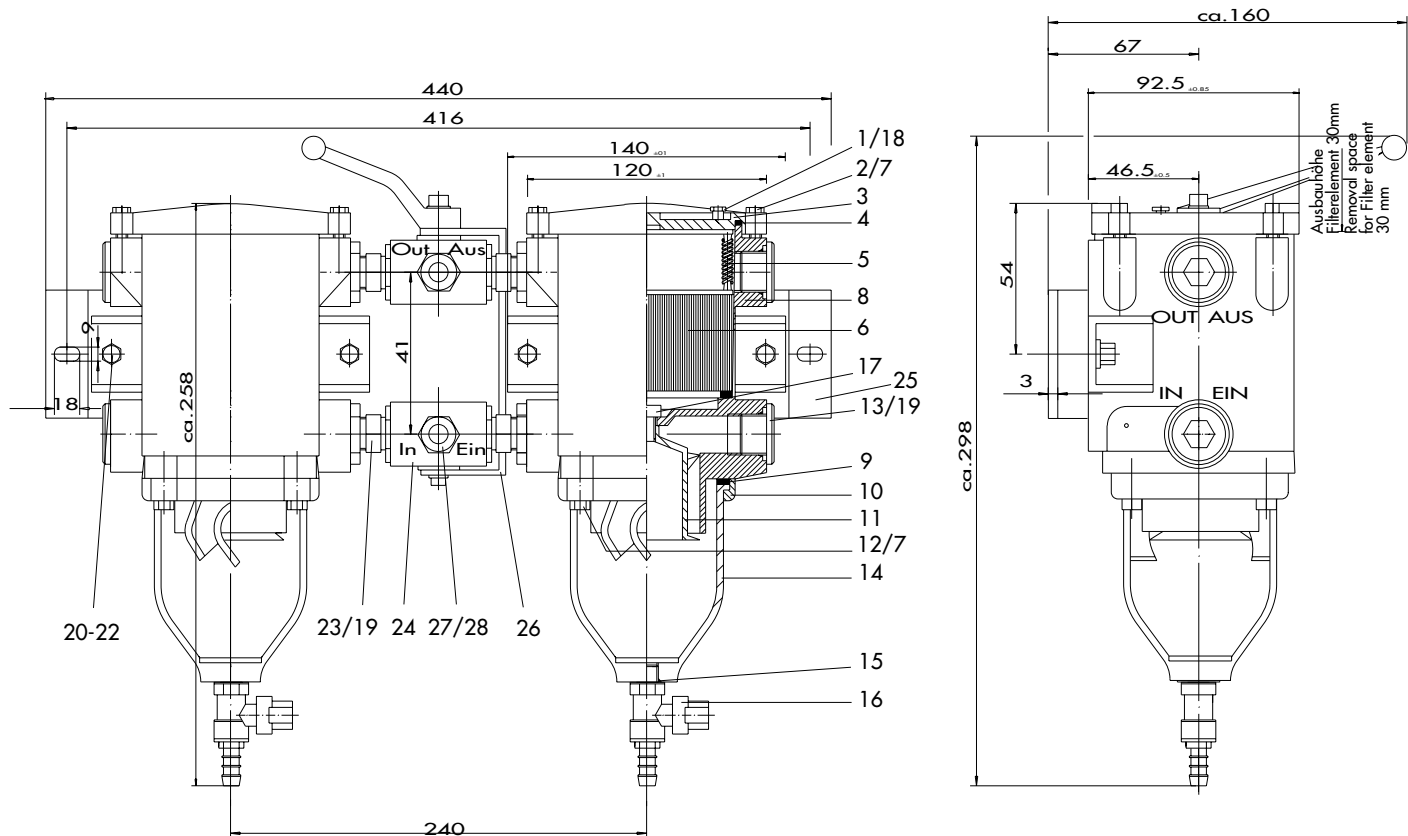

FLUSSDIAGRAMM · FLOW DIAGRAM

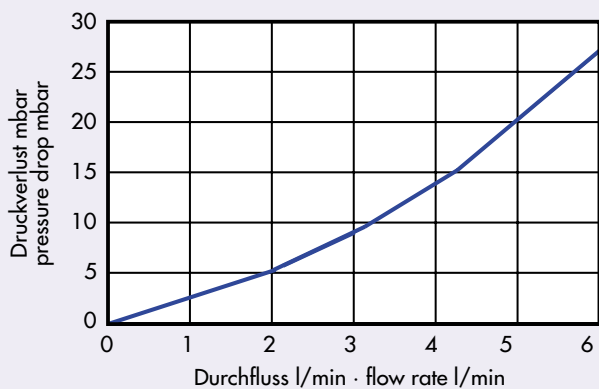

Max. Durchflussmenge: 5 l/min
Max. flow rate: 5 l/min

Anschluss: 12 mm Rohr Ø
Connection: 12 mm Pipe Ø

Technische Änderungen vorbehalten
We reserve the right to make technical changes without notification

Willibrord Lösing
Filter-Technik



Postfach 86 6009
45517 Hattingen
Essener Straße 108
45529 Hattingen
Telefon 023 24/9 46 00
Telefax 023 24/408 42